





- Adjustable time delay from Off to 60 minutes, humidity sensor, motion sensor functionality built in (can be disabled) (motion grille sold separately)
- Built-in high speed toggle switches allow for 80CFM/110CFM/140CFM selection with AutoFlo technology.
- Continuous low speed operation (optional) with auto boost to high speed based on humidity, motion, or manual override
- \bullet AutoFloTM feature automatically senses real world static pressure and maintains CFM up to 0.5 in wc
- 6" duct connector with back draft damper
- Galvanized steel construction
- Extremely quiet (0.4 Sones max) operation
- Energy efficient model far exceeding Energy Star Efficiency requirements






PERFORMANCE (HVI Certified)

Duct Size (IN)	Speed	Airflow (CFM)		Sones @	Frequency	Voltage	Max Power (Watts)		Efficacy (CFM/Watts)*	RPM's		Max Current
		0.1"	0.25"	0.1" SP	(Hz)	(∨)	0.1"	0.25"	0.1	0.1"	0.25"	(Amps)
6	Toggle	80	80	0.3	60	120	6	11.1	14.7	544	812	0.5
		110	108	0.3			9	15	13.5	592	790	
		140	136	0.4			13	21	11.5	683	853	

^{*}Maximum power was tested at 32.4 watts

HVI PERFORMANCE CURVE:

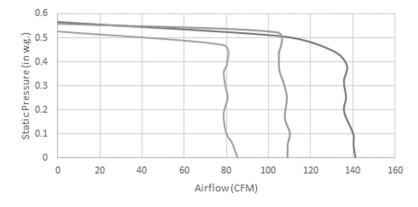

DIMENSIONS:

