



ReFresh RFV8-120AC-ES24V

Submittal



RFV8-120AC-ES24V




Specifications

- ES24V – Envirosense Ventilation Control mounted to outside of unit
- Low profile, galvanized, 26 ga., housing
- 6” round duct connectors
- Test port for easy air flow measurement
- Integral mounting tabs allow mounting in any orientation
- Backward inclined wheel
- AC motor, 115/120V, 60 Hz
- 4 pole, permanently lubricated, thermally protected motor
- 6’ power cord
- Inlet guard for motor protection
- cULus 507 Listed
- Integral backdraft damper

Options and Accessories

- Motorized backdraft damper
- Duct heater

Dimensions

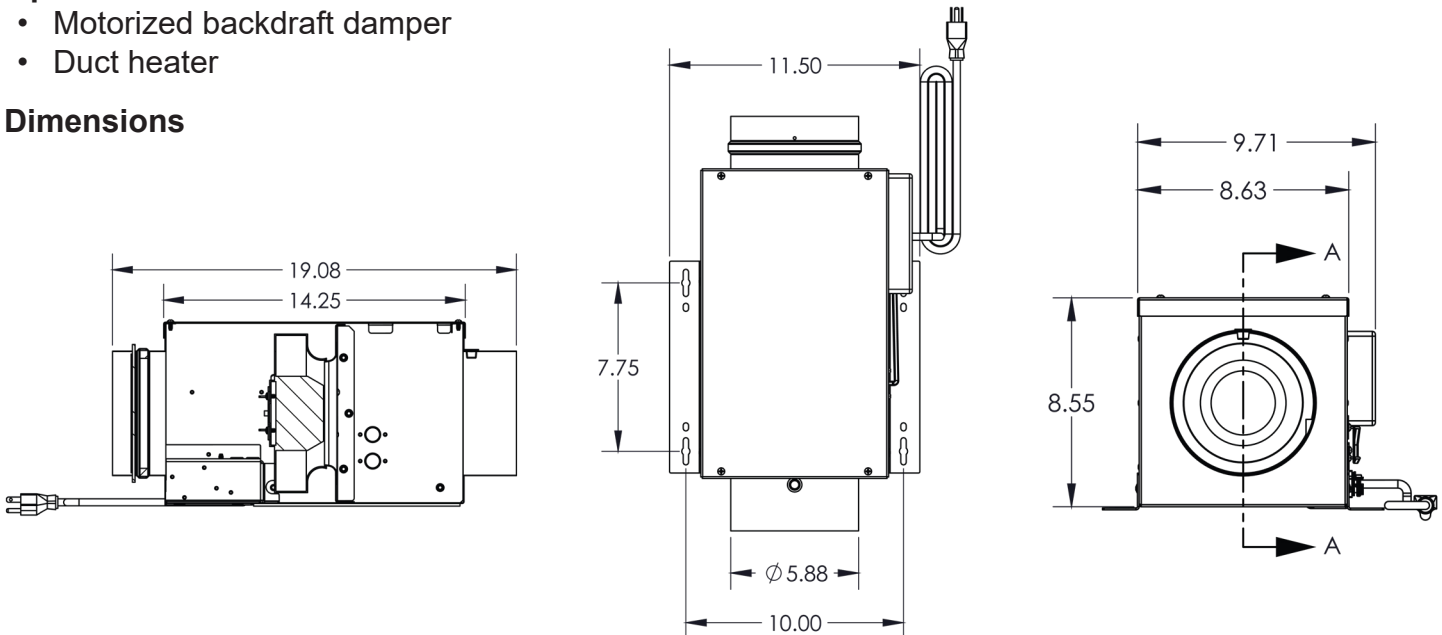




ES24V - Envirosense Ventilation Control Submittal

ES24V

The ES24V control can be used with our RF-reFresh, TD-MIXVENT, TD-SILENT, PV-POWERVENT, or TR-ERVs. When paired with S&P fans the ES24V provides fully controllable fresh air into a residence. With three modes (Off, On, and Eco-Mode) the ES24V ensures compliance with today's outside air codes.

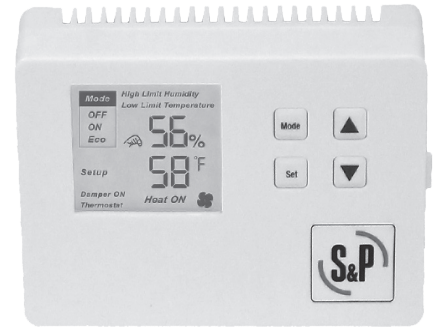

- “Off” allows for manual override as required by the code
- “On” allows for continuous operation
- “Eco-Mode” allows homeowner to set humidity and/or temperature minimum and maximums.
- When readings exceed the programmed min/max parameters the control reverts to a minimum operation sequence to satisfy code requirements. When the outside air is within the min and max range the fan will operate at the set time limit or continuously to meet the code requirements, i.e. 25 minutes every hour.

Features

- Easy to read, back-lit LCD screen
- 24 VAC control
- Intuitive four-button user interface
- Easily programmable to operate the supply fan continuously or intermittently using on and Eco-Modes respectively
- Measures outdoor humidity and temperature and minimizes ventilation at adjustable high and low outdoor temperature and humidity lockouts
- Optional interlocking with central A/C blower motor
- Control programming maintains ASHRAE 62.2-2010 even during high and low temperature and humidity limit lockouts
- Installation flexibility – ability to override humidity and temperature control
- Auxiliary terminals for optional supply fan, duct heater and motorized damper connections

Dimensions

