

CSTR - Shutter Fans

Circulate Large Volumes of Air




The World's Leading Producer of
Air Movement Products

6393 Powers Avenue
Jacksonville, Florida 32217-2298
P: 800.961.7370 F: 800.961.7379
www.solerpalau-usa.com



Features & Benefits

- Totally assembled
- Motor is totally enclosed maintenance free, high efficiency, sealed ball bearings and UL/ULC certified
- Corrosion resistant aluminum shutter with tie bar to reduce shutter flapping and opening on windy days
- One year limited warranty
- Safety chrome grill on intake side meets OSHA standards. Fan must be mounted 7' above ground level on the exhaust side
- Includes cord on 12" only

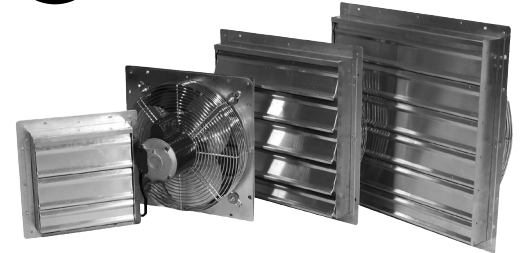

Product Specifications

MODEL	Size	Spd	HP	RPM	HZ	Ph	CFM @.0 SP Hi/Lo	CFM @.05 SP Hi/Lo	CFM @.10 SP Hi/Lo	CFM @.20 SP Hi/Lo	CFM per WATT @.0 SP
CSTR-12C	12	VAR	1/10	1725	60	1	1200/400	114/380	1080/360	900/300	11/9
CSTR-16	16	VAR	1/10	1725	60	1	2100/735	1995/700	1890/660	1575/550	15/13
CSTR-20	20	VAR	1/3	1725	60	1	5000/1750	4750/1665	4500/1575	3750/1315	18/14
CSTR-24	24	VAR	1/2	1725	60	1	6250/2200	5940/2080	5625/1970	4690/1640	18/14

MODEL	VOLTS	AMPS Hi/Lo	Drive	Blade	Cord
CSTR-12C	115	1.0	DD	3-Alum	9'
CSTR-16	115/230	1.0/0.05	DD	3-Alum	No
CSTR-20	115/230	3.5/1.7	DD	3-Alum	No
CSTR-24	115/230	4.8/2.4	DD	3-Alum	No

For more information contact us at www.solerpalau-usa.com or 1.800.961.7370 for additional submittal drawings.

Soler & Palau will not be responsible for fabrication changes or errors resulting from customer use of a non-current submittal drawing.

MODEL	Wt./lbs.	LxWxH	Rough Opening Size	Recommended Inlet Size (Sq ft)
CSTR-12C	22.40	16 x 16 x 13"	12.5" x 12.5"	1.75
CSTR-16	25.75	20 x 20 x 13"	16.5" x 16.5"	2.75
CSTR-20	35.94	24 x 24 x 13"	20.5" x 20.5"	4.00
CSTR-24	47.06	28 x 28 x 14.5"	24.5" x 24.5"	5.50

FAN DATA		
Fan No.	Qty.	Model No.

PROJECT: _____ CONTRACTOR: _____
 LOCATION: _____ REVISION DATE: _____
 FORM NO.: _____ SUBMITTED BY: _____ DATE: _____
 ENGINEER: _____ APPROVED BY: _____ DATE: _____