

MODEL TR70

(Energy Recovery Ventilators (ERV))



6393 Powers Avenue
 Jacksonville, Florida 32217-2298
 P: 800.961.7370 F: 800.961.7379
 www.solerpalau-usa.com



Specifications


Ventilation Type: Static Plate, Heat and Humidity Transfer				
Typical Airflow Range: 40-70 CFM				
Unit may be mounted in any orientation				
Number Motors: One, 0.08 hp				
V	Hz	Phase	Input Watts	FLA
120	60	Single	94 @ 69 CFM	0.9
Control Voltage: 24 VAC				
Filters: MERV 8, spun polyester media. 7-12" x 10-1/2" x 1"				
Weight: 39 lbs (unit), 48 lbs (in carton)				
Shipping Dimensions: 21-1/2" W x 29" L x 14-1/2" H				
Options:				
SPTL - Percentage Timer Control				
SPBL - Push Button Point-of-Use Control				
SFM - Percentage Timer Control with Furnace Interlock				
SHW-20 - Dehumidistat Control				

Core Performance

Airflow CFM	ESP in H ₂ O	Temp EFF%	Total EFF% Winter/Summer*
46	0.40	81	74/60
59	0.30	78	71/57
73	0.20	74	68/53
86	0.10	71	64/49

* Contact Factory for HVI certification report for complete certified rating.

Dimensions

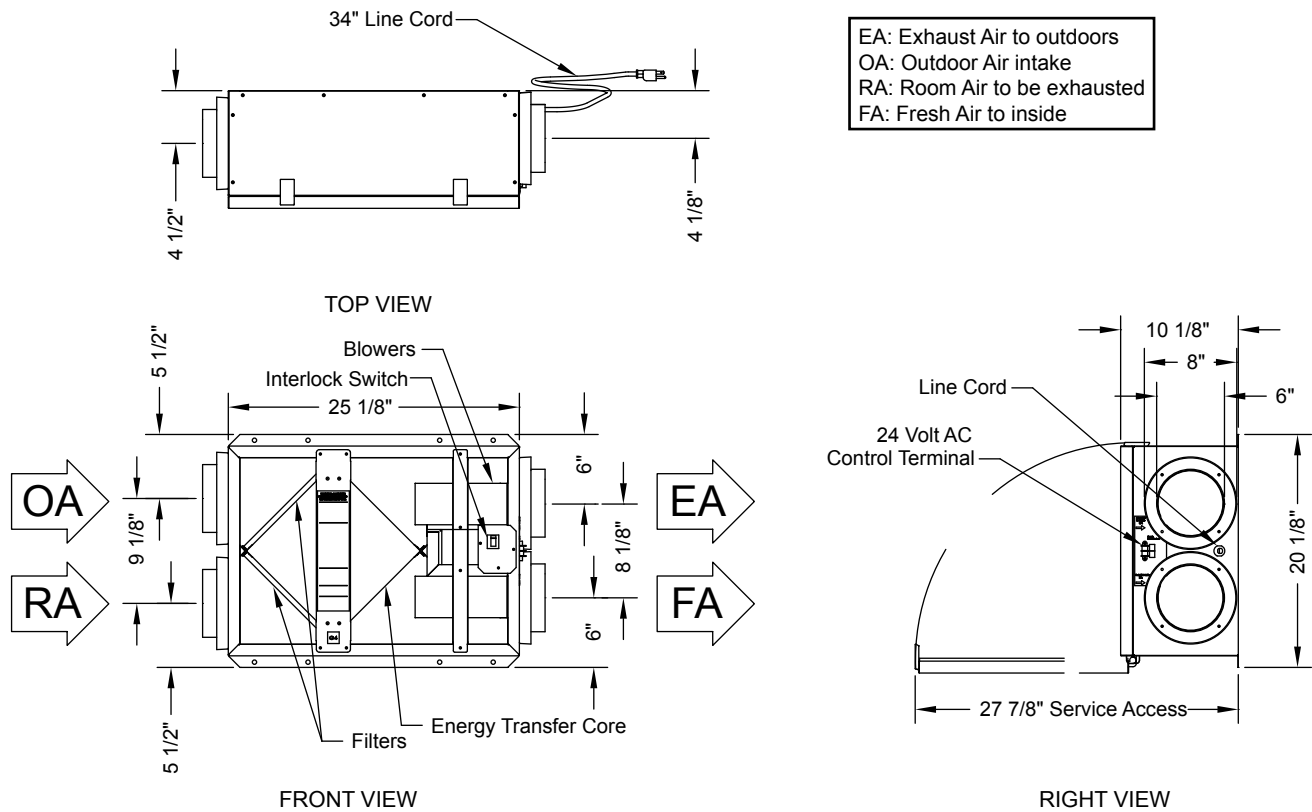

For more information contact us at www.solerpalau-usa.com or 1.800.961.7370 for additional submittal drawings. Soler & Palau will not be responsible for fabrication changes or errors resulting from customer use of a non-current submittal drawing.