
PCLP100XP
















DIMENSIONS


Duct Dia. (oval)		Weight				
	Х	Υ	W	D	Н	(lbs)
4"	13	14	10-1/4	10-1/4	3-3/8	7



PERFORMANCE (HVI CERTIFIED)

Airflow (CFM)	Static Pressure (in w.g.)	Sound (Sones)	Efficacy (CFM/W)*	Max Power (Watts)*	Voltage / Frequency	Max Current (Amps)	Nom RPM
100	0.1	1.5	4.2	24.7	120VAC / 60Hz	0.21	878
86	0.25	-	3.7				

^{*}Values are based off test data.

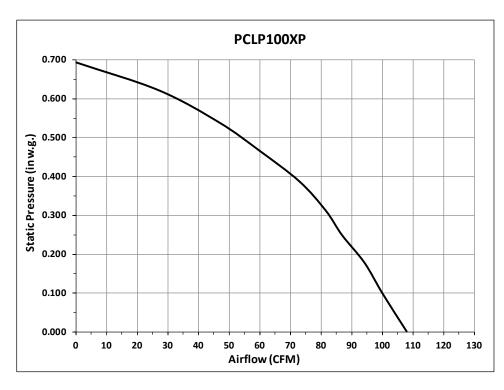

ACCESSORIES

- PCLPSCP Speed Control
- PCLPHSP Humidity Sensor
- PCLPLEDK LED Lighted Grille
- PCLPRD/PCRD Radiation Damper
- PCLPLEDKRD LED Lighted Grille & Radiation Damper Kit
- PCLPR4-3 4" Oval to 3" Round Reducer



*PCLP100XP is also available in contractor packs (PCLP100XPF – 4 e.a. motor/grille & PCLPHXP – 4 e.a. housing)

