



MODEL IFFT


Centrifugal Jet Fan



FEATURES

- Thrust air between 13 and 90N
- Air flow up to 5238 CFM
- cULus 705 Listed
- Available in 60 Hz; 230V, 460V, and 575V
- Galvanized sheet steel housing
- Industry Best 5 year housing warranty, 1 year motor

DIMENSIONS

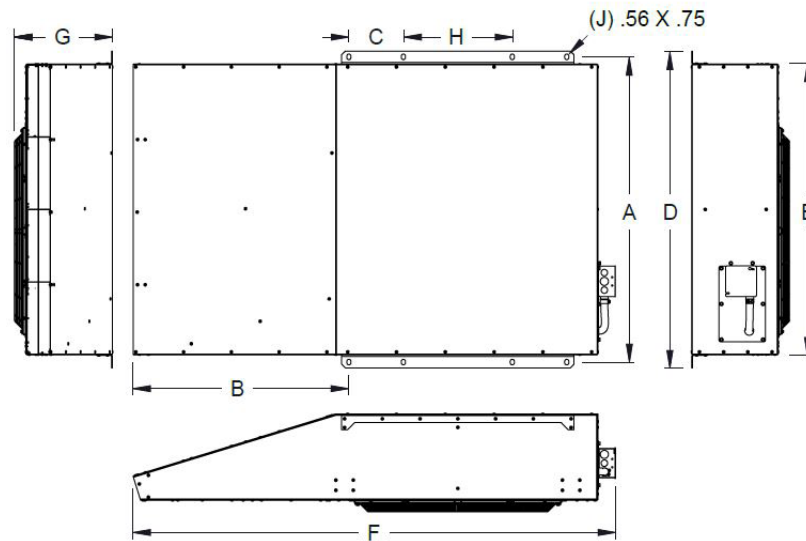

Model	A	B	C	D	E	F	G	H	J	WT (LB)
IFFT-50N	33-7/16	22-1/2	10-13/16	35	31-5/8	50-7/8	12-3/16	-	6	168
IFFT-75N	41-5/16	29-1/4	7-3/8	42-7/8	39-1/2	65-3/8	14-13/16	14-3/4	8	265
IFFT-100N	41-5/16	29-1/4	7-3/8	42-7/8	39-1/2	65-3/8	14-13/16	14-3/4	8	265

NOTE: All dimensions shown are in inches.

* Approximate unit weight includes an average cataloged motor and no crating.

PERFORMANCE

Model	Number of Poles	RPM	Thrust (N)	Flow (CFM)	Nominal Power (kW)	Full Load Current 230V (A)	Full Load Current 460V (A)	Full Load Current 575V (A)	Frequency (Hz)	Sound Level (LwA)	Sound Pressure* (LpA) 5 ft
IFFT-50N	4/8	1650 / 855	47 / 13	3384 / 1754	1.5 / 0.22	6.13 / 2.06	3.07 / 1.03	2.45 / 0.82	60	95 / 79	83 / 66
IFFT-75N	4/8	1715 / 865	72 / 18	4709 / 2366	2.5 / 0.45	9.69 / 3.18	5.12 / 1.61	4.10 / 1.29	60	97 / 82	85 / 70
IFFT-100N	4/8	1715 / 865	90 / 23	5238 / 2631	2.5 / 0.45	9.69 / 3.18	5.12 / 1.61	4.10 / 1.29	60	98 / 82	86 / 69

*Sound pressure, at 5 feet hemispherical, in free field conditions, for comparison

SOUND DATA

4 POLE

IFFT	63	125	250	500	1K	2K	4K	8K	LwA	Sones
50	63	75	87	90	90	88	82	75	95	35
75	64	77	88	91	93	90	83	80	97	40
100	69	79	91	92	94	90	84	79	98	43

8 POLE

IFFT	63	125	250	500	1K	2K	4K	8K	LwA	Sones
50	52	68	69	75	73	70	63	54	79	13
75	54	66	70	79	76	74	67	57	82	15
100	55	69	71	79	75	72	65	54	82	14